

Gravity Conveyor

Gravity Roller Conveyor modules are designed to transport light and medium duty loads in a number of system applications. Gravity Roller Conveyor is ideal for moving products in loading and unloading, shipping and receiving and station-to-station operations. The modules are offered in a range of widths and can be configured with single or double rollers depending on system requirements.

Technical Data:

<p>Widths:</p> <ul style="list-style-type: none"> ▪ Single Roller- Nominal Widths (NW) of 15", 18", 24", 30", 36" and 48" ▪ Double Roller- nominal Widths (NW) of 36", 44", and 52" ▪ Additional widths available upon request 	<p>Frame:</p> <ul style="list-style-type: none"> ▪ 3 1/2" deep formed 12 gauge steel channel ▪ Powder coated NACI Blue as a standard ▪ Additional colors available upon request 	<p>Rollers:</p> <ul style="list-style-type: none"> ▪ 1.9" diameter, 16 gauge galvanized, carrying rollers with 7/16" hex axles ▪ Roller spacing options available are 2", 3" and 4"
<p>Supports:</p> <ul style="list-style-type: none"> ▪ Optional floor supports available on maximum 120" centers 	<p>Lengths:</p> <ul style="list-style-type: none"> ▪ Bed Section lengths available are 5 foot and 10 foot as standard ▪ Additional lengths available upon request 	<p>Load:</p> <ul style="list-style-type: none"> ▪ 100 lbs per linear foot as a standard ▪ Contact NACI for larger load requirements

Features:


- Reduced Installation Time
- Virtually Maintenance Free
- Durable Steel Frame
- Economical Design

Applications:


- Station-to-station
- Shipping
- Receiving
- Assembly
- Sortation
- Staging

Options:

- End Stops
- Wheel, Extendible & Skewed

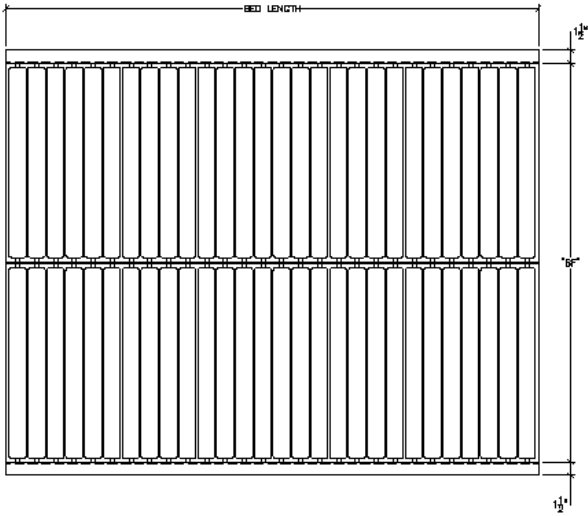

DOUBLE ROLLER

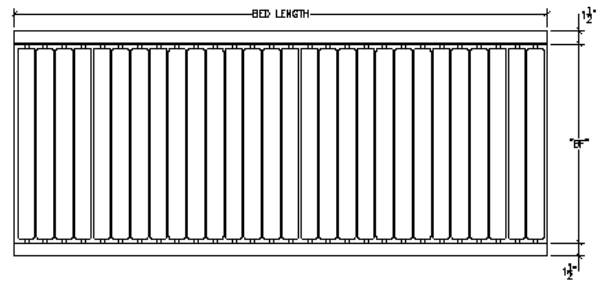

SINGLE ROLLER

